

26 Watt Handheld Fluorescent Light

Owner's Instructions

Printed in China

WARNING! Read and understand all instructions. Failure to follow all instructions listed below, may result in electric shock, fire and/or serious personal injury.

SAVE THESE INSTRUCTIONS.

1

Avoid dangerous environments. The light is not waterproof. Don't use this light in damp or wet locations. Don't handle this light or try to plug in when your hands are wet or damp. **Never** attempt to pick up the plugged-in light when it falls into water which will result in fatal electrocution. The light is intended for use as a general indoor lighting. Do not use in flammable or explosive atmospheres. Only for dry location and indoor use.

Keep children away. All visitors should be kept at a distance from work area.

Do not abuse the cord. Never use the cord to carry the light or pull the plug from an outlet. Keep cord away from heat, oil, sharp edges or moving parts. Replace damaged cords immediately. Damaged cords increase the risk of electric shock.

Dress properly. Do not wear loose clothing or jewelry. Contain long hair. Keep your hair, clothing and gloves away from moving parts. Loose clothes, jewelry and long hair can be caught in moving parts.

2

Do not overreach. Keep proper footing and balance at all times. Proper footing and balance enables better control of the tool in unexpected situations.

Use safety equipment. Always wear eye protection. Dust masks, non-skid safety shoes, hard hats and hearing protection must be used for appropriate conditions.

Always make certain that the power source conforms to the requirements on the light. The light is only use on 110-125v and is equipped with an approved 3 conductor cord with a 3-prong, grounding type plug. **Always** disconnect the power before installing lamps, servicing or inspecting the light for any reason.

Check damaged parts. Before further use of the light, a guard or other part that is damaged should be carefully checked to determine that it will operate properly and perform its intended function. Do not use tool if it does not turn it on and off. The damaged parts should be properly

3

repaired or replaced by qualified repair personnel. Service or maintenance performed by unqualified personnel could result in a risk of injury.

Never attempt to plug the light into a non-grounded extension cord and always be sure that the extension cord in good electrical condition. The extension cord should be a minimum of 16 gauge, 3 conductor.


Never operate the light with the clear protective lens removed.

WARNING! This product or its power cord contains lead, a chemical known to the State of California to cause cancer and birth defect or other reproductive harm. Wash hands after handling.

Electrical rating

WARNING! Do not overload. Check the amperage of the tools or appliances to be plugged into outlet of the work light. The maximum rating of the outlet is 1500 watts, 12 amps, 125 volts load.

4

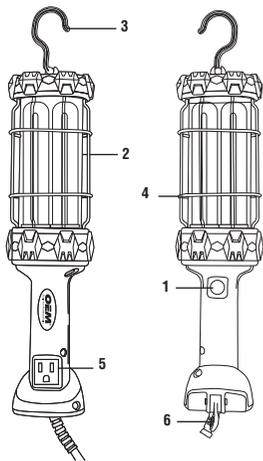

Know your light

1. On/Off switch
2. Fluorescent lamp
3. Swivel hook

5

4. Metal guard
6. Cord with hook hole

Model: 25984

Cord length : 15 feet

Cord type / Gauge: SJT – 16 / 3

Lamp wattage: 13(2pc)

Total max. cord rating:

1625 watts, 13 amps, 125 volts, 60 hz

Max. outlet rating:

1500 watts, 12amps, 125 volts, 60 hz



OPERATION INSTRUCTIONS

WARNING! The voltage specifications on the rating plate must correspond with the supply voltage.

Before attempting to use your tool, familiarize yourself with all operating features and safety requirement.

Operating the light. Plug power cord into any 110-125v standard wall outlet. Depress switch (1) in the handle to turn the light on.

Hanging work light. The 360 degree swivel

6

hanging hook and the hook hole in the cord allows you to position for vertical , horizontal or storage/non-use.

WARNING! When hanging hook is in use, do not shake light. The hook is not intended to support additional weight. Do not attach or hang anything additional to the light or risk of breakage may occur.

Replacing fluorescent lamp.

WARNING! Disconnect the light cord from electrical outlet before proceeding with lamp replacement.

1. Removing the top portion of the light by removing screws in the side of handle.
2. Pull straight up the lamp to remove it while holding the handle
3. Put new lamp into lamp holder till it is locked in place.
4. Assembly the top portion of the light onto the handle by tighten the screws.

7

MAINTENANCE

Remove dirt and grim as soon as it accumulates. Use a soft, damp cloth and a mild soap, if needed. Be sure not to get the electrical plug wet. Never submerge any part of the light in any solution to clean it. Do not use solvents such as gasoline, turpentine, etc. to clean the light.

ONE YEAR LIMITED WARRANTY(excluding lamps). ~~If this product fails due to a defect in material or workmanship within one year from the date of purchase, return it to the place of purchase. This warranty: (1) excludes fluorescent lamps that comes with this product as they are expendable parts; (2) shall be void if this tool is used for commercial and/or rental purposes; and (3) does not cover any losses, injuries to persons/property or costs. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.~~

8